


# Fiber Optic Fixed Attenuator

## Features:

- Adopts high precision ceramic ferrule with good concentricity
- 100% inspected for optical characteristics & fiber end face finish
- Low insertion loss and return loss
- RoHS Compliant
- Telcordia GR-326, IEC, TIA/EIA Standard compliant

## Application:

- Premise distribution networks
- Backbone networks
- Enterprise networks
- Telecom networks
- Data center
- FTTH

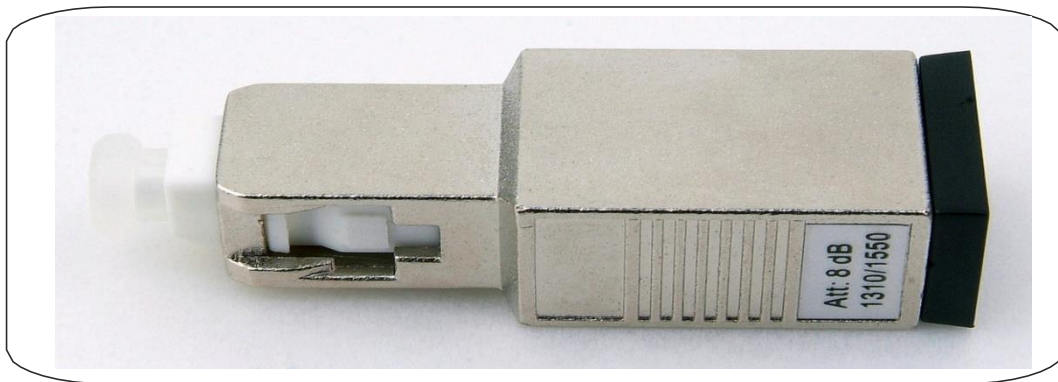

Optical Performance	
<b>Attenuator</b>	
Type	SC
Type of Polish	PC/APC
Body	Metal
Ferrule Material	Zirconia Ceramic
Color	Blue, green or tailor made
Technical Specification	
Return Loss	≥50 (PC), ≥55 (UPC) and ≥65 (APC)
Attenuation	From 1dB to 30dB
Tolerance	±0.5dB(1~10dB), ±1.0dB(11~30dB)
Durability	1000 Times
Operating Temperature	
-40 ~ + 85 °C	