


Fiber Optic LC SM 9/125um Simplex Pigtail

Features:

- Adopts high precision ceramic ferrule with good concentricity
- 100% inspected for optical characteristics & fiber end face finish
- Low insertion loss and return loss
- RoHS Compliant
- Telcordia GR-326, IEC, TIA/EIA Standard compliant

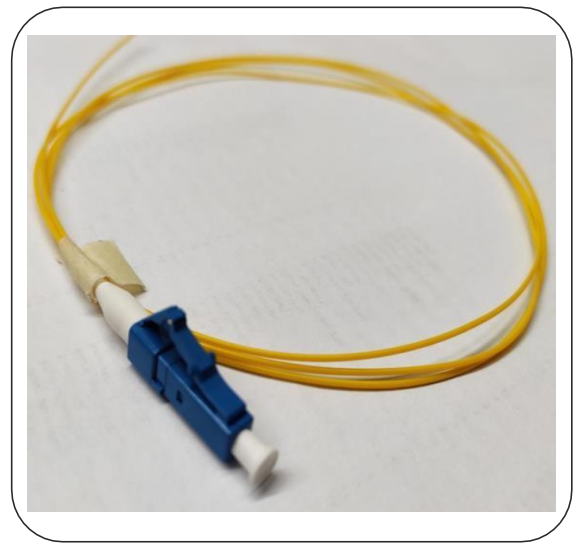

Application:

- Premise distribution networks
- Backbone networks
- Enterprise networks
- Telecom networks
- Data center
- FTTH

Specifications:

- Connector Type: LC Simplex
- Optical Fiber: Single mode 9/125um G652D
- Cable type: Yellow 900micron Buffer
- Cable color, Length: Yellow, 1m – 150m

General Specification	
Connector	
Type	LC
Type of Polish	PC
Body	Plastic
Ferrule Material	Zirconia Ceramic
Cable	
Fiber	SM
Type	Yellow 900micron Buffer
Technical Specification	
Cable	
Insertion Loss	≤ 0.3dB @ 850 & 1300 nm Wavelength
Return Loss	≥45dB @ 1310 & 1550 nm Wavelength
Operating Temperature	
-20 ~ + 70 °C	